

SERIE CILINDRICO C102 C

Palo cilindrico con codolo Ø 60
Cylindrical pole with spigot Ø 60

Palo in acciaio Ø102 a sezione circolare realizzato in un unico tratto con codolo finale, composto da elementi tubolari saldati in sequenza. Asola ingresso cavi e asola per morsetti con finitura del bordo del taglio idonea anche per l'applicazione di portella incassata a filo palo. Zincatura a caldo secondo la norma UNI EN ISO 1461 e successiva spazzolatura per garantire una perfetta finitura superficiale. Verniciatura a polveri poliestere.

Circular cross Ø102 section steel pole consisting of one single section with end spigot, made of tubular elements welded in sequence. Cable inlet slot and terminal box slot with finished edges, also suitable for the application of a flush mounted cover door. Hot galvanized in accordance with UNI EN ISO 1461, and subsequent brushing to ensure perfect surface finish. Polyester powder coating.

DISEGNO TECNICO TECHNICAL DESIGN




SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS

MODELLO Model	H	H 1	H2	H3	H4	D	D1
C.102.3.C60.3500	3500	4000	1000	200	500	102	60
C.102.3.C60.4000	4000	4500	1000	200	500	102	60
C.102.3.C60.4500	4500	5000	1000	200	500	102	60
C.102.3.C60.5000	5000	5500	1000	200	500	102	60
C.102.3.C60.5500	5500	6000	1000	200	500	102	60

SPESSORE Thickness	MATERIALE Material	PESO Weight	ASOLA MORS. Hatch Slot	ASOLA ING. CAVI Cable Entry Slot	PORTATA m2 /Kg * Technical Capacity m2/kg *
3 - 3	S235JR	31Kg	H186xL45	H132xL38	0,81 / 62
3 - 3	S235JR	35 Kg	H186xL45	H132xL38	0,63 / 48
3 - 3	S235JR	38 Kg	H186xL45	H132xL38	0,48 / 37
3 - 3	S235JR	42 Kg	H186xL45	H132xL38	0,35 / 28
3 - 3	S235JR	46 Kg	H186xL45	H132xL38	0,28 / 22

Zona 8 cat. I | Zone 8 cat. I |

PIASTRA (OPZIONALE) Plate (Optional)	TIRAFONDO (OPZIONALE) Anchor Bolt (Optional)
L250xL250S10 - I 180	Ø18 - L500
L250xL250S10 - I 180	Ø18 - L500
L250xL250S10 - I 180	Ø18 - L500
L250xL250S10 - I 180	Ø18 - L500
L250xL250S10 - I 180	Ø18 - L500

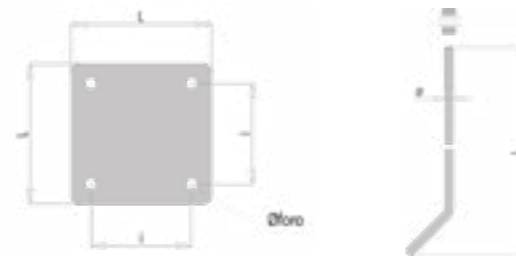

Valori espressi in millimetri | Measures in millimeters

PORTELLA CON MORSETTIERA (OPZIONALE) TERMINAL BLOCK WITH HATCH (OPTIONAL)

PORTELLA ESTERNA External Cover Plate	PORTELLA FILO PALO Cover Plate
T39	RESET 11
T39	RESET 11
T39	RESET 11
T39	RESET 11
T39	RESET 11



Disponibili a 1 o 2 fusibili | Available with 1 or 2 fuses

10

9

8

7

6


5

4

3

H

Altezza punto luce
Available luminaire heights

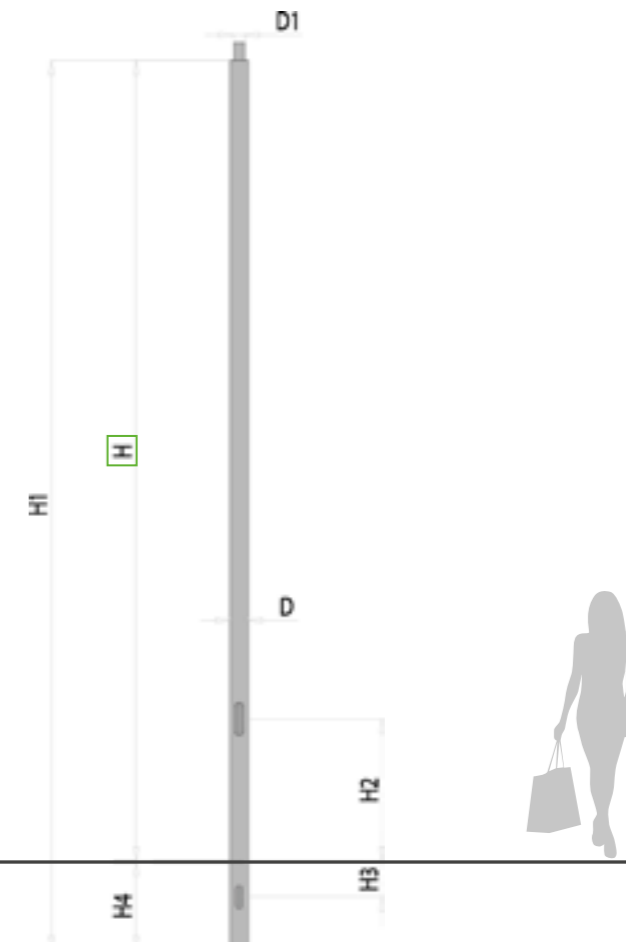

Valori espressi in metri | Measures in metres